


RENOLIT ALKORPLAN VOGUE/TOUCH/CERAMICS/2000/3000 *Reinforced pool membrane for on site lining*



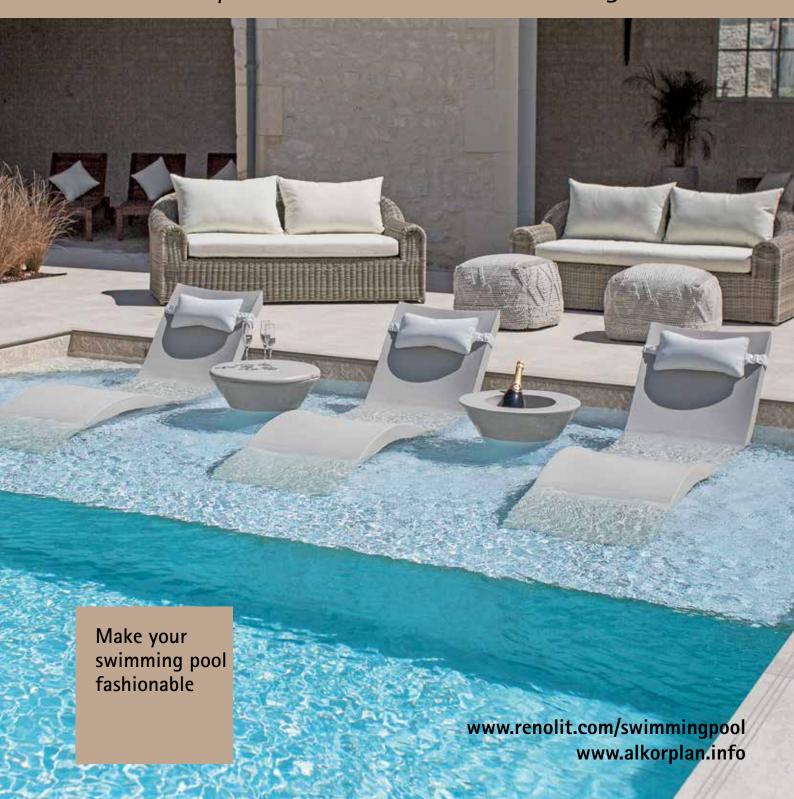

RENOLIT ALKORPLAN makes your dreams come true.

Our pool liners convert even the most modest pool into the centre of attraction in your garden, regardless of its size or its location.

RENOLIT ALKORPLAN and its many options help you create a unique and exclusive setting for your enjoyment.



No matter what your garden looks like RENOLIT ALKORPLAN allows you to create a unique, customised area just for you.

Large pools or tiny pools ...

Many hotel pools, Olympic pools or aquatic park pools in Europe have RENOLIT ALKORPLAN liners installed in them, as apart from requiring minimum maintenance, they guarantee complete water-tightness and it is possible to install them in half the time it takes to install other systems.



- · It can be installed on any surface.
- · Clean installation, with no noise and in half the time it takes to install other liners.
- · It requires practically no maintenance.
- · No matter the size and shape of the pool.





RENOLIT ALKORPLAN adapts to your needs




It is the perfect liner for rooftop pools, basement pools or any place where there are cracks or micro pores that could cause dampness, water leaks or flooding.



RENOLIT ALKORPLAN allows you to enjoy your pool in peace, without worrying about leaks.





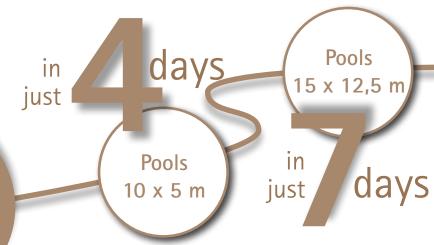

Fast renovation!

For all pool sizes and shapes!






RENOLIT ALKORPLAN VOGUE







VOGUE

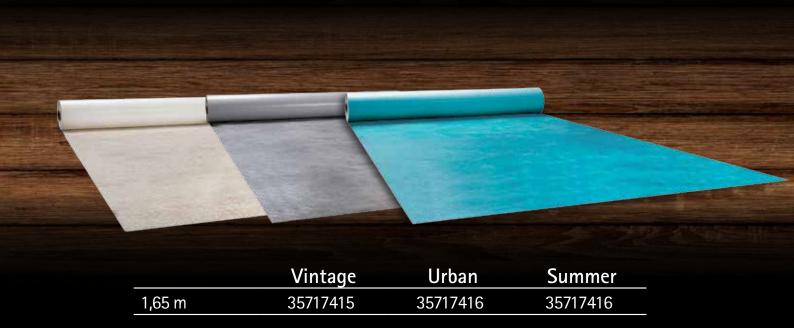

THICKNESS 2 mm

GUARANTEE 1 9 years WATERTIGHTNESS



2 mm reinforced laminate, printed and with relief, inspired in interior design and trends. With the same properties as the **TOUCH** range.

www.alkorplan.info/vogue





| RENOLIT ALKORPLAN VOGUE | Width | Thickness | Ref. |
|-------------------------|--------|-----------|----------|
| Vintage | 1.65 m | 2 mm | 35717415 |









| RENOLIT ALKORPLAN VOGUE | Width | Thickness | Ref. |
|-------------------------|--------|-----------|----------|
| Vintage | 1.65 m | 2 mm | 35717415 |

Urban



| RENOLIT ALKORPLAN VOGUE | Width | Thickness | Ref. |
|-------------------------|--------|-----------|----------|
| Urban | 1.65 m | 2 mm | 35717416 |



RENOLIT ALKORPLAN VOGUE Urban





| RENOLIT ALKORPLAN | VOGUE | Width | Thickness | Ref. |
|-------------------|-------|--------|-----------|----------|
| Urban | | 1.65 m | 2 mm | 35717416 |



RENOLIT ALKORPLAN VOGUE Summer






RENOLIT ALKORPLAN VOGUE Width **Thickness** Ref. Summer 1.65 m 2 mm 35717417

TOUCH

Are you aware of RENOLIT ALKORPLAN TOUCH?

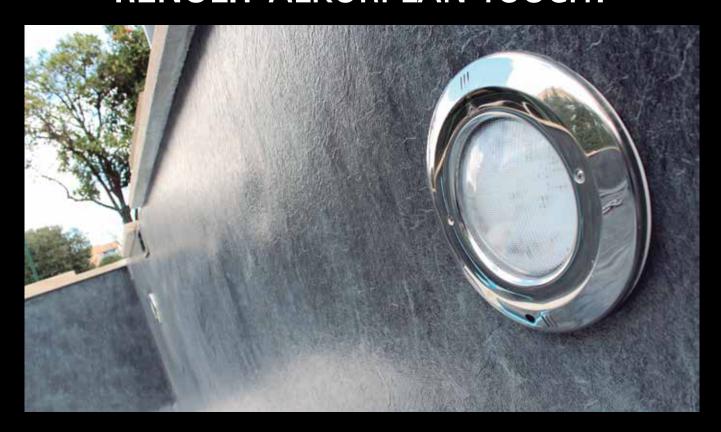

Reinforced liner with exclusive 3D designs and prints, inspired by nature.


RENOLIT ALKORPLAN TOUCH reinforced membrane reproduces natural textures and gives personality and character to pool linings, making them unique and original.

It's the pool liner revolution!

TOUCH



| | Authentic | Relax | Elegance |
|--------|-----------|----------|----------|
| 1.65 m | 35517402 | 35517401 | 35517501 |

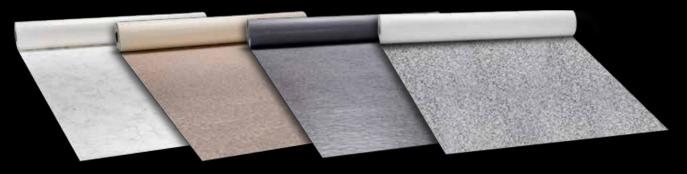

| | Vanity | Sublime | Prestige | Origin |
|--------|----------|----------|----------|----------|
| 1.65 m | 35517409 | 35517407 | 35517403 | 35517413 |







2 mm reinforced laminate, printed and with relief, inspired by nature to give character and personality to swimming pools.

www.alkorplan.info/touch

Origin



| RENOLIT ALKORPLAN TOUCH | Width | Thickness | Ref. |
|-------------------------|--------|-----------|----------|
| Origin | 1.65 m | 2 mm | 35517413 |




RENOLIT ALKORPLAN TOUCH Origin





RENOLIT ALKORPLAN TOUCH Width Thickness Ref.

Origin 1.65 m 2 mm 35517413

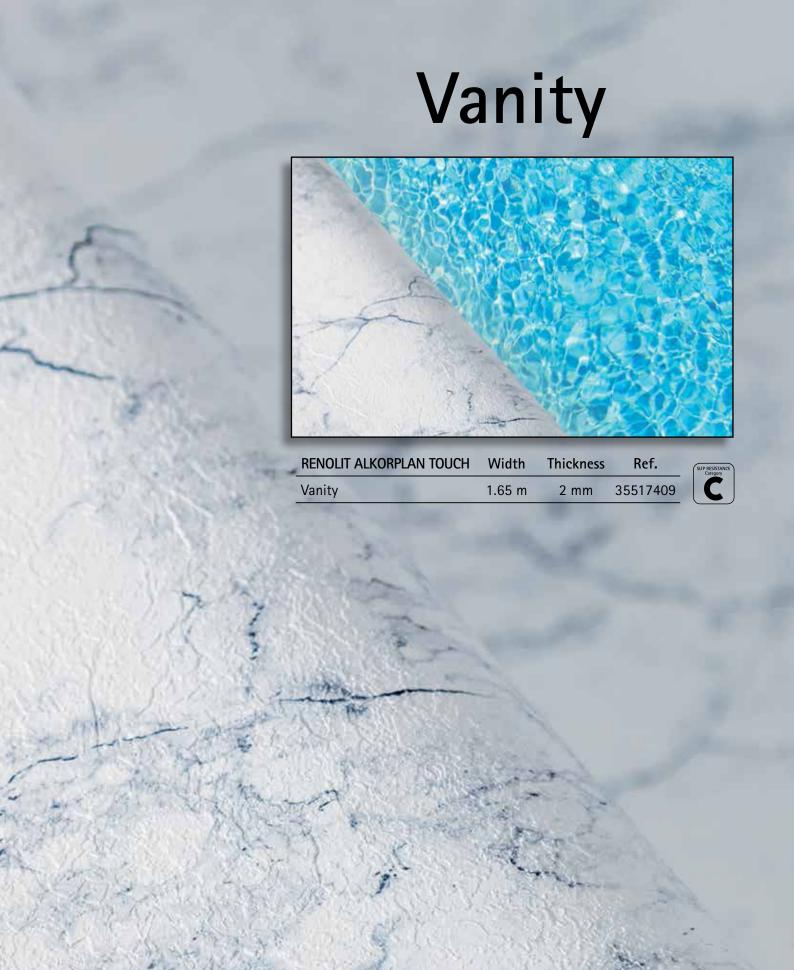

RENOLIT ALKORPLAN TOUCH Vanity





RENOLIT ALKORPLAN TOUCH Width Thickness Ref.

Vanity 1.65 m 2 mm 35517409

Sublime



| RENOLIT ALKORPLAN TOUCH | Width | Thickness | Ref. |
|-------------------------|--------|-----------|----------|
| Sublime | 1.65 m | 2 mm | 35517407 |



RENOLIT ALKORPLAN TOUCH Sublime





| RENOLIT ALKORPLAN TOUCH | Width | Thickness | Ref. |
|-------------------------|--------|-----------|----------|
| Sublime | 1.65 m | 2 mm | 35517407 |





| RENOLIT ALKORPLAN TOUCH | Width | Thickness | Ref. |
|-------------------------|--------|-----------|----------|
| Prestige | 1.65 m | 2 mm | 35517403 |



RENOLIT ALKORPLAN TOUCH Prestige





| RENOLIT ALKORPLAN TOUCH | Width | Thickness | Ref. |
|-------------------------|--------|-----------|----------|
| Prestige | 1.65 m | 2 mm | 35517403 |









RENOLIT ALKORPLAN TOUCH Elegance





| RENOLIT ALKORPLAN TOUCH | Width | Thickness | Ref. |
|-------------------------|--------|-----------|----------|
| Elegance | 1.65 m | 2 mm | 35517501 |

Relax




| RENOLIT ALKORPLAN TOUCH | Width | Thickness | Ref. |
|-------------------------|--------|-----------|----------|
| Relax | 1.65 m | 2 mm | 35517401 |




RENOLIT ALKORPLAN TOUCH Relax



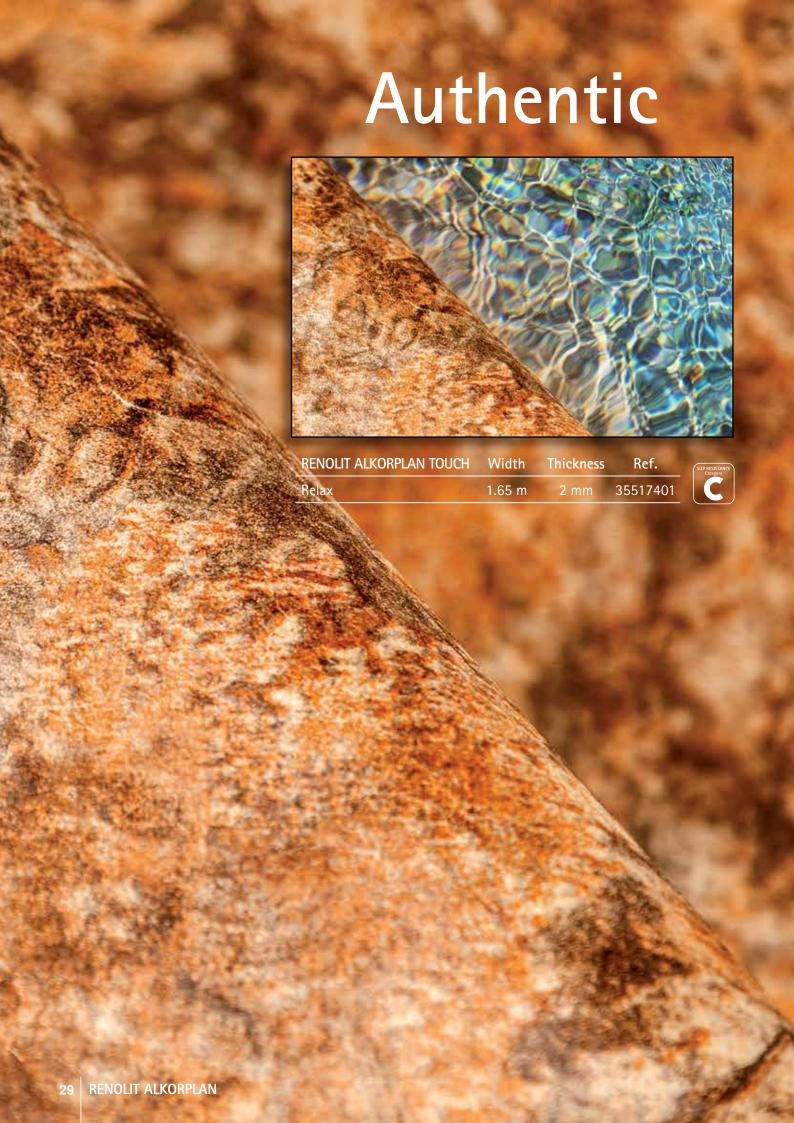

RENOLIT ALKORPLAN TOUCH Authentic

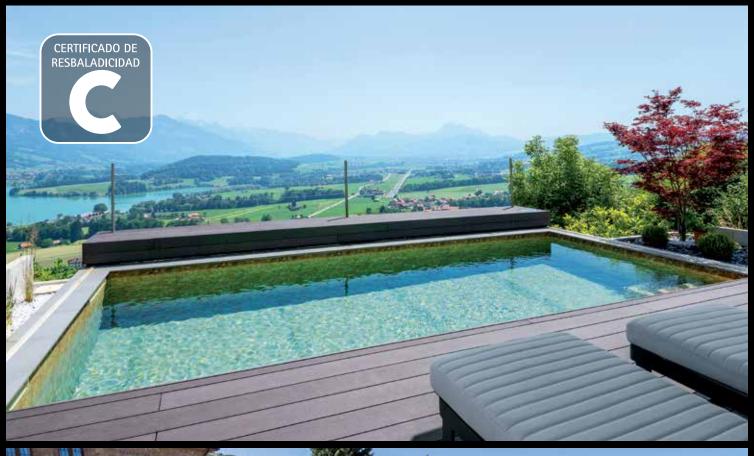



| L. H. | RENOLIT ALKORPLAN TOUCH | Width | Thickness | Ref. |
|-------|-------------------------|--------|-----------|----------|
| 100 | Authentic | 1.65 m | 2 mm | 35517402 |



No detached tiles or crumbling grouting!!

With the most careful aesthetics and with many advantages over any existing pool liner in the market:


- Guaranteed watertight.
- Quick and easy installation compared to glass mosaic tiling.
- 3 No fallen tiles or crumbling grout.
- 4 Minimum maintenance.
- The 2mm thickness creates a more durable and resilient membrane.
- 6 Easy to weld with an immaculate finish.







www.alkorplan.info/ceramics

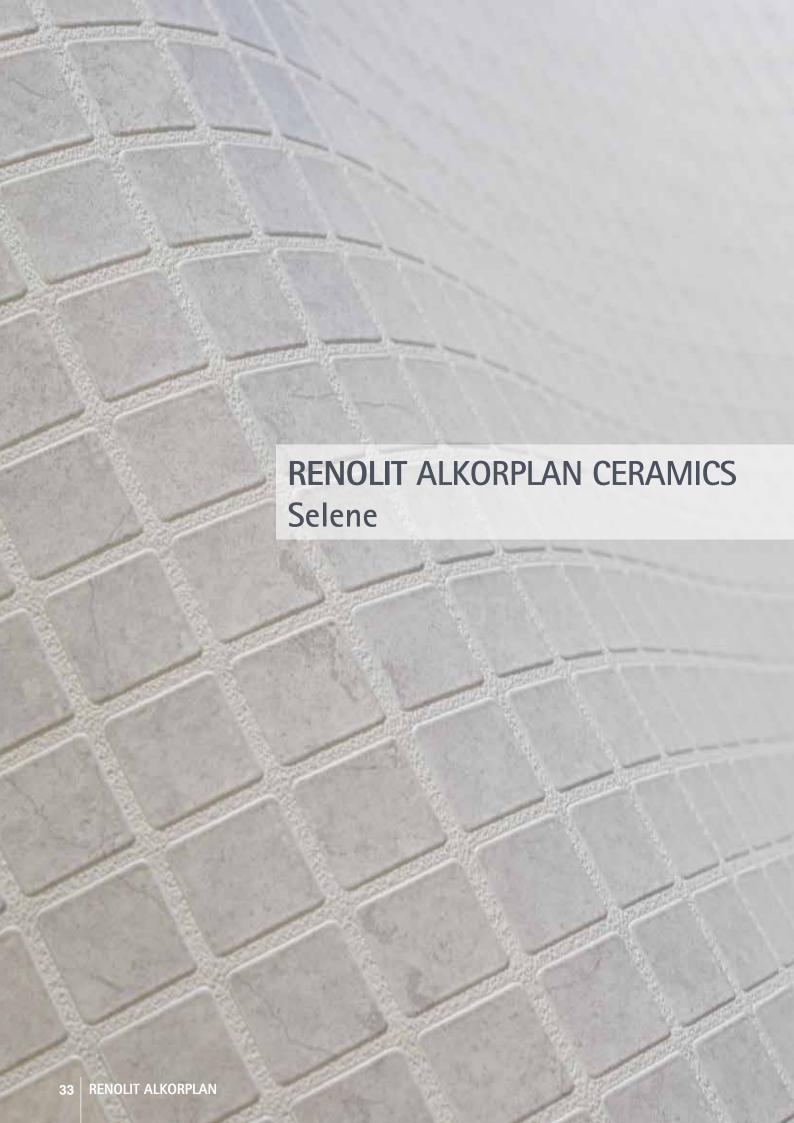




RENOLIT ALKORPLAN CERAMICS Selene







RENOLIT ALKORPLAN CERAMICS Width Thickness Ref. Selene 1.65 m 2 mm 35617203

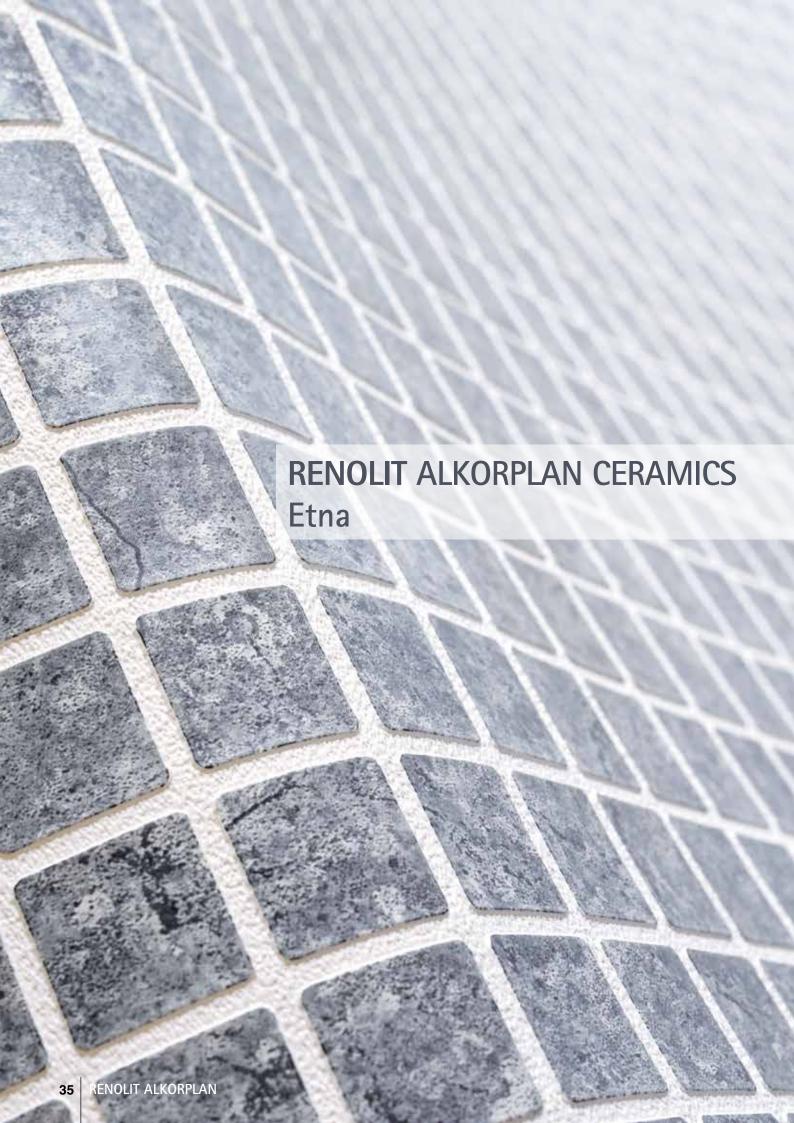



RENOLIT ALKORPLAN CERAMICS Etna








RENOLIT ALKORPLAN CERAMICS Width Thickness Ref.

1.65 m 2 mm 35617204 Etna

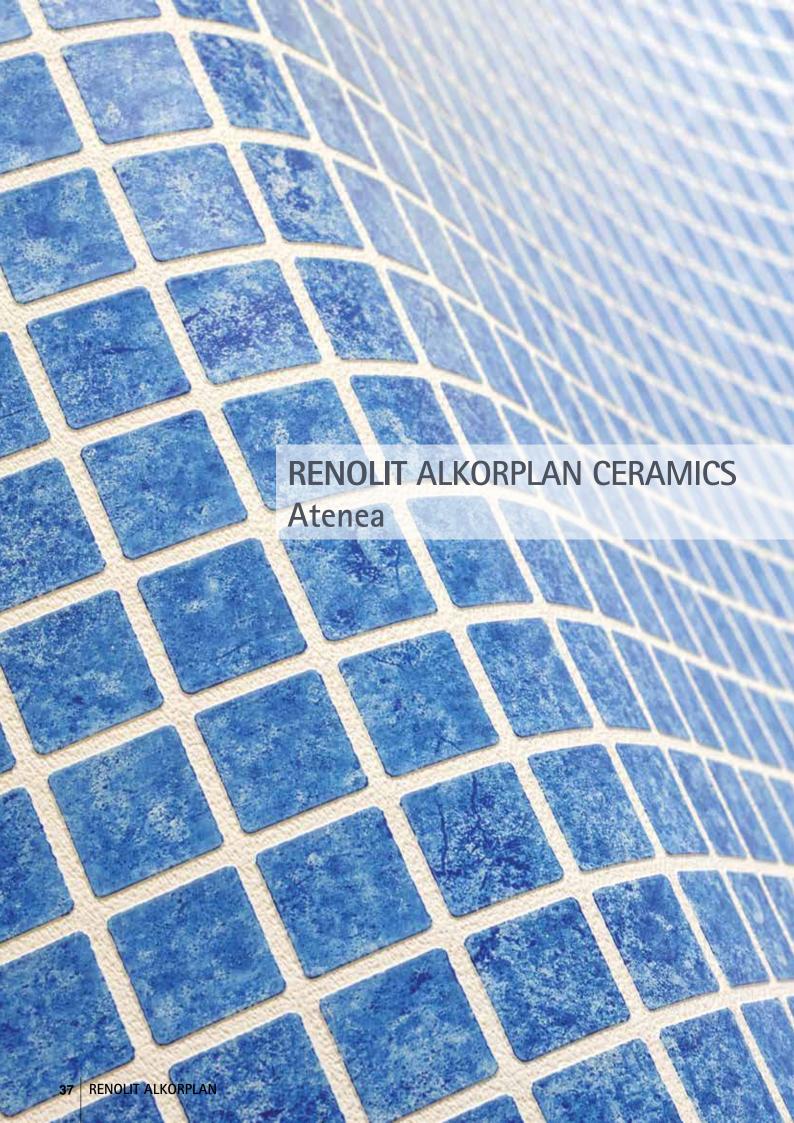



RENOLIT ALKORPLAN CERAMICS Atenea









RENOLIT ALKORPLAN CERAMICS Width Thickness Ref. 35617202 Atenea 1.65 m 2 mm

RENOLIT ALKORPLAN 38



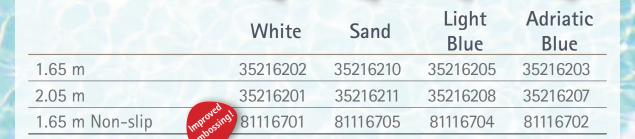

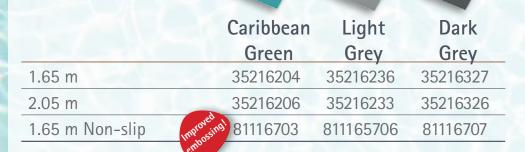

Lacquered 1.5 mm single colour reinforced laminate, with highly resistant pigments and durable plasticisers designed to last in a swimming pool.







www.alkorplan.info/alkorplan2000

RENOLIT ALKORPLAN2000 White





| RENOLIT ALKORPLAN2000 | Width | Thickness | Ref. |
|-----------------------|--------|-----------|----------|
| White | 1.65 m | 1.5 mm | 35216202 |
| White | 2.05 m | 1.5 mm | 35216201 |
| White Non-Slip | 1.65 m | 1.8 mm | 81116701 |

RENOLIT ALKORPLAN2000 Sand





| RENOLIT ALKORPLAN2000 | Width | Thickness | Ref. |
|-----------------------|--------|-----------|----------|
| Sand | 1.65 m | 1.5 mm | 35216210 |
| Sand | 2.05 m | 1.5 mm | 35216211 |
| Sand Non-Slip | 1.65 m | 1.8 mm | 81116705 |

RENOLIT ALKORPLAN2000 Light Blue





| RENOLIT ALKORPLAN2000 | Width | Thickness | Ref. |
|-----------------------|--------|-----------|----------|
| Light Blue | 1.65 m | 1.5 mm | 35216205 |
| Light Blue | 2.05 m | 1.5 mm | 35216208 |
| Light Blue Non-Slip | 1.65 m | 1.8 mm | 81116704 |
| | | | |

RENOLIT ALKORPLAN2000 Adriatic Blue





| RENOLIT ALKORPLAN2000 | Width | Thickness | Ref. |
|------------------------|--------|-----------|----------|
| Adriatic Blue | 1.65 m | 1.5 mm | 35216203 |
| Adriatic Blue | 2.05 m | 1.5 mm | 35216207 |
| Adriatic Blue Non-Slip | 1.65 m | 1.8 mm | 81116702 |
| | | | |

RENOLIT ALKORPLAN2000 Light Grey






| RENOLIT ALKORPLAN2000 | Width | Thickness | Ref. |
|-----------------------|--------|-----------|----------|
| Light Grey | 1.65 m | 1.5 mm | 35216236 |
| Light Grey | 2.05 m | 1.5 mm | 35216233 |
| Light Grey Non-Slip | 1.65 m | 1.8 mm | 81116706 |
| | | | |

RENOLIT ALKORPLAN2000 Dark Grey



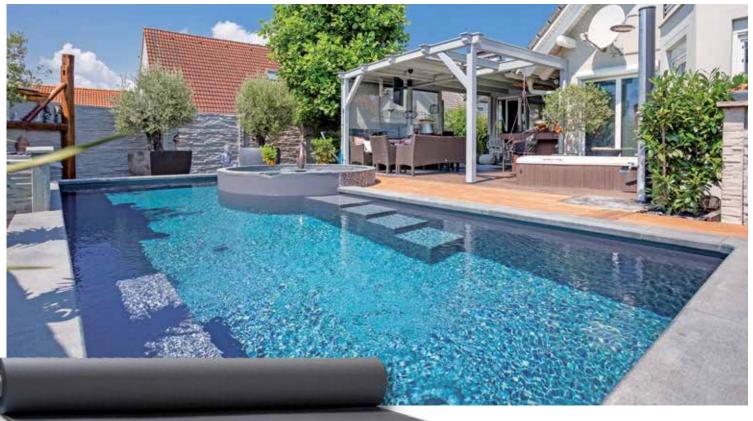

| RENOLIT ALKORPLAN2000 | Width | Thickness | Ref. |
|-----------------------|--------|-----------|----------|
| Dark Grey | 1.65 m | 1.5 mm | 35216327 |
| Dark Grey | 2.05 m | 1.5 mm | 35216326 |
| Dark Grey Non-slip | 1.65 m | 1.8 mm | 81116707 |

RENOLIT ALKORPLAN2000 Caribbean Green





| 5 mm 35216204 |
|---------------|
| 5 mm 35216206 |
| 3 mm 81116703 |
| _ |





1.65 m 35417217 35417220 35417209



Double-lacquered printed 1.5 mm reinforced laminate available in exclusive designs to decorate at the same time as waterproof.








www.alkorplan.info/alkorplan3000

RENOLIT ALKORPLAN3000 Persia Blue



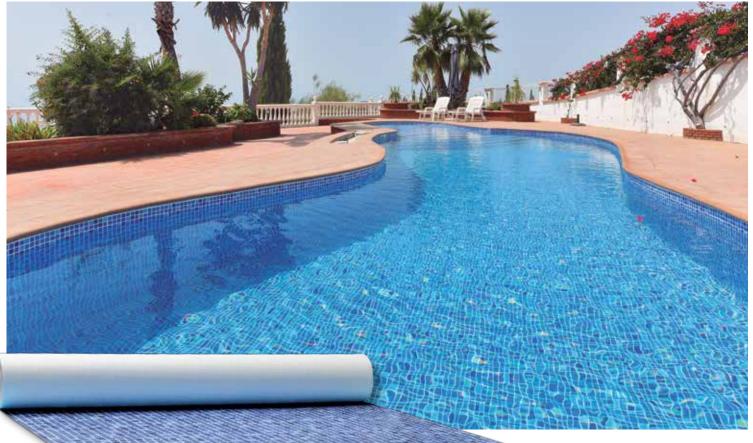

RENOLIT ALKORPLAN3000 Width Thickness Ref. Persia Blue 35417217 1.65 m

RENOLIT ALKORPLAN3000 Persia Sand





| RENOLIT ALKORPLAN3000 | Width | Thickness | Ref. |
|-----------------------|--------|-----------|----------|
| Persia Sand | 1.65 m | 1.5 mm | 35417220 |

RENOLIT ALKORPLAN3000 Bysance Blue





| RENOLIT ALKORPLAN3000 | Width | Thickness | Ref. |
|-----------------------|--------|-----------|----------|
| Bysance Blue | 1.65 m | 1.5 mm | 35417209 |

RENOLIT ALKORPLAN3000 Carrara






| RENOLIT ALKORPLAN3000 | Width | Thickness | Ref. |
|-----------------------|--------|-----------|----------|
| Carrara | 1.65 m | 1.5 mm | 35417214 |

RENOLIT ALKORPLAN3000 Marble



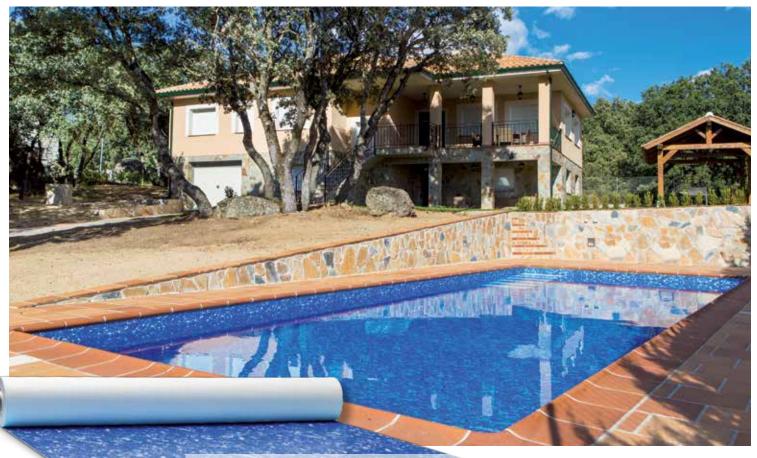

RENOLIT ALKORPLAN3000 Width Thickness Ref. Marble 1.65 m 1.5 mm 35417213

RENOLIT ALKORPLAN3000 Platinum







RENOLIT ALKORPLAN3000 Width Thickness Ref.

Platinum 1.65 m 1.5 mm 35417402

Butt welding

RENOLIT recommends the butt welding technique on the pool floor on **VOGUE**, **TOUCH** and **CERAMICS** membranes for an impeccable finish of your pool. From an aesthetic point of view, the butt welding technique ensures the joints are practically invisible, especially in swimming pools lined with **RENOLIT ALKORPLAN VOGUE**, **RENOLIT ALKORPLAN TOUCH** or **RENOLIT ALKORPLAN CERAMICS** membranes.

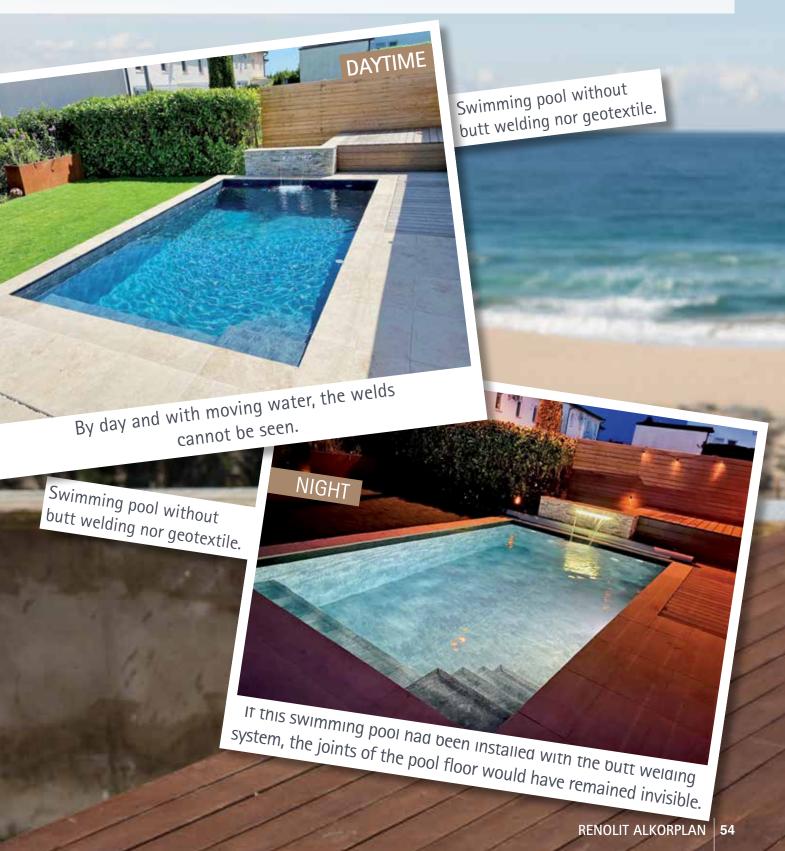

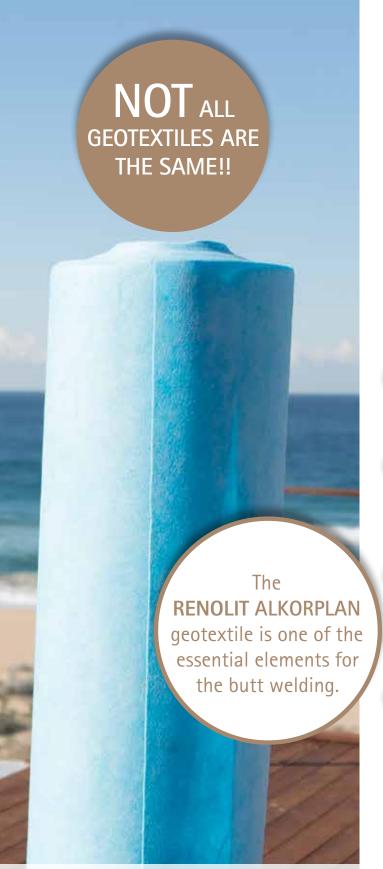

RENOLIT ALKORPLAN geotextile is an exclusive RENOLIT fungicide felt that is installed under the membrane to protect it from any irregularities that the surface of the pool may have and make the bathers steps more comfortable.

NOT

ALL GEOTEXTILES ARE THE SAME!!

RENOLIT ALKORPLUS geotextile is made of blue polypropylene, which is rot-proof, and always marked with the **RENOLIT ALKORPLUS** brand.

Advantages:

- 1) The fungicide treatment prevents the proliferation of bacteria under the membrane.
- 2 The geotextile disguises any small imperfection that may exist in the structure of the substrate under the membrane.
- 3 Adds a much more comfortable feel for the bather.
- 4 Helps to maintain the temperature of the pool water.
- 5 Plays a key role in the butt welding system.

| Reference | Width (m) |
|-----------|-----------|
| 81006005 | 1.50 * |
| 81006006 | 1.65 |
| 81006007 | 2.00 |

^{*}Specific for butt welding.

Advice for preserving your RENOLIT ALKORPLAN liner



Carry out a daily test to ensure the the chlorine level is 1ppm and that the pH is between 7.0-7.6



If you disinfect your swimming pool with chlorine or with a salt electrolysis machine it is essential than the level of the chlorine is 1ppm and the pH level is between 7.0 and 7.6.

If you disinfect with bromide the level should be 1ppm and the pH level between 7 and 8. Excessive use of bromide can cause the liner to become brown in colour.






If the pool has a salt chlorinator you must add stabilizer at the beginning of the season



The chlorine generated by the saline electro chlorinator is stronger than normal chlorine.

To dilute add 30ppm of a isocyanuric acid stabilizer at the beginning of the swimming pool season and check daily that level of chlorine at 1ppm and the pH between 7.0 and 7.6.



This prevents the chlorinator producing more chlorine than neccesary, which could bleach the liner and irritate eyes.





It is necessary that the TA level is maintained between 100 and 175ppm




TA (total alkalinity) represents the water's capacity for neutralising acids. A balanced TA level keeps pH from fluctuating and getting out of control. A TA level under 100 ppm turns water corrosive. Damage to the liner would be

We recommend checking the PA level weekly or after rainfall.





Protect your swimming pool in summer and winter and do not empty it



In the summer keep the water level constant.

In winter protect skimmers and filter systems against frost. Ask a pool specialist for the best winter treatment to keep the water in perfect condition the following season. Above all cover the swimming pool in winter.





Water from wells, or of unknown origin should be analysed and, if necessary, treated before

it is used to fill or top up the pool



If the water does not come for the mains supply or from a guaranteed tanker it is very probable that the water will contain diluted metals such as iron, copper or magnesium.

These minerals can react with the chemical products and produce stains on the liner.

If this happens ask a specialist to carry out a treatment with **RENOLIT ALKORPLUS Antistain**.







No chemical products should come into direct contact with the liner



The correct and safest way of introducing any chemical product into the swimming pool is by using the skimmer with the circulation pump working.

If it is powder, granules or liquid and it is required to be put directly into the swimming pool, it must be diluted before in a bucket of water, and poured into different areas of the swimming pool. The circulation pump must always be in use to prevent concentration of a product in one area.

Avoid the use of floating dispensers because they can spend too much time in the same position and can bleach the liner.







Do not use chemical products which contain copper

Always read the level of the composition of the chemical products that you use, especially those for algae.

Some anti-algae products contain copper sulphate, these should be avoided.

Use anti- algae with a quaternary ammonia base. These are the best products for your hair and your skin. If by accident you have used a product containing copper, you should apply **RENOLIT ALKORPLUS Antistain**.







Avoid a build up of dirt and calcareous deposits on the waterline

The lacquer that protects the **RENOLIT ALKORPLAN** laminate will repel dirt; however, low maintenance and high bathing loads will accelerate the build up of waterline deposits.

Regular cleaning of the waterline with **RENOLIT ALKORCLEAN**® applied with a sponge or cloth will prevent the build up of grease and scale and avoid permanent staining.







Never use abrasive tools or aggressive cleaning products

Do not use aggressive chemical products or cleaning equipment, such as solvents; brushes with wire or stiff bristles; and abrasive pads or cloths that will damage the membrane. The liner is coated with a protective lacquer which is stain and dirt resistant, however it may be damaged if cleaned with abrasive materials or solvents.

RENOLIT ALKORCLEAN® is an ideal and efficient cleaner for your liner. It may be ordered though your Swimming Pool Specialist.





RENOLIT ALKORPLAN VOGUE

If you are looking for comfort and design in your home, why don't you do it in your pool as well?

www.alkorplan.info/vogue



UK sales RENOLIT Ibérica s.A. c/o G.G. Tomkinson Ltd. The Willows, Pattenden Lane Marden, Kent TN12 9QJ – UK Phone: +44 7387 158288 e-mail: Jb@jbinlimbo.co.uk

This document substitutes and annuls any other that has been previously published on the same subject. The colours shown in this catalogue can vary from the original.

RENOLIT reserves the right to change colours and designs.

www.renolit.com/swimmingpool www.alkorplan.info

